INSTALLATION INSTRUCTIONS

Display Interface

Model: FSB-V

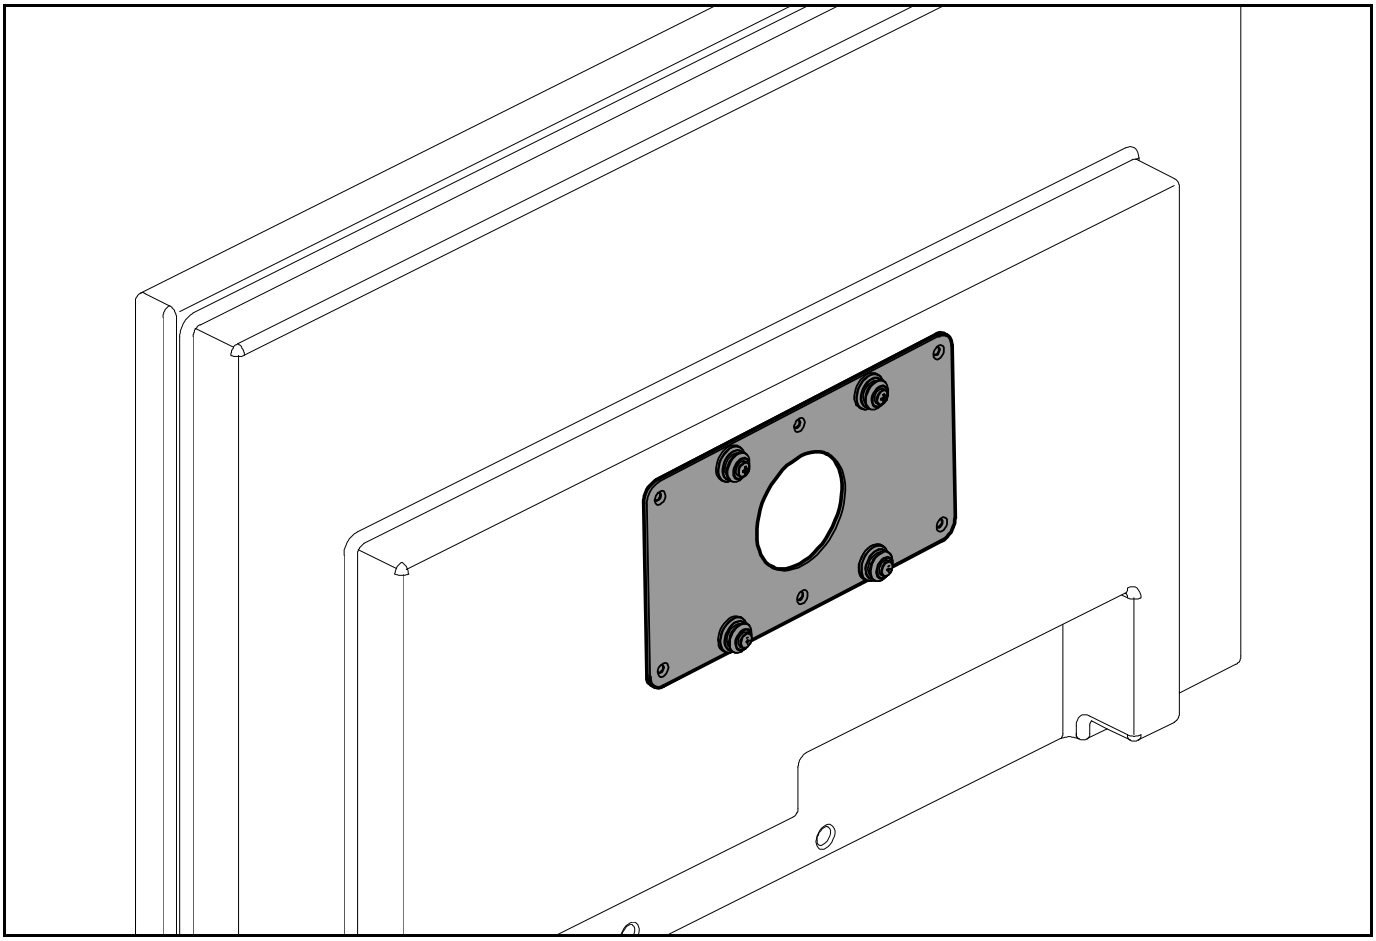

BEFORE YOU BEGIN

⚠

CAUTION: To prevent damage that could affect or void the Factory warranty, and to the equipment that will be attached to it, thoroughly study all instructions and illustrations before you begin the installation.

- If you have any questions about this installation, contact Chief Manufacturing.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.

Milestone AV Technologies, and its affiliated corporations and subsidiaries (collectively, "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

CHIEF®
Our Mounts. **Your Vision.**

Chief Manufacturing, a products division
of Milestone AV Technologies
8401 Eagle Creek Parkway, Savage, MN 55378
• P: 800.582.6480 / 952.894.6280 • F:877.894.6918 / 952.894.6918

8804-000293 RevB
©2009 Milestone AV Technologies,
a Duchossois Group Company
www.chiefmfg.com
10/09

IMPORTANT WARNINGS AND CAUTIONS!

WARNING: Failure to provide adequate structural strength for this component can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the structure to which this component is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the component.

TOOLS REQUIRED FOR INSTALLATION

- Phillips Screw Driver

INSPECT MOUNT BEFORE ASSEMBLY

CAUTION: Carefully inspect components for shipping damage. If damage is apparent, call your carrier claims agent and do not continue with installation until the carrier has reviewed the damage. (See Figure 1)

Table 1: Parts

ITEM	DESCRIPTION	QTY
10	BRACKET, Interface, 100 x 200	1
20	BUTTON, Mounting	4
30	SCREW, Phillips Flat Head, M4 x 12mm	6
40	SCREW, Phillips Flat Head, M4 x 20mm	6
50	SCREW, Phillips Flat Head, M4 x 25mm	6
60	SCREW, Phillips Pan Head, M4 x 10mm	4
70	SCREW, Phillips Pan Head, M4 x 12mm	4
80	SCREW, Phillips Pan Head, M4 x 20mm	4
90	SCREW, Phillips Pan Head, M4 x 25mm	4
100	SCREW, Phillips Pan Head, M4 x 30mm	4
110	SPACER, 3/4" x 1/4"	6
120	SPACER, Nylon 3/4" x 1/2"	6

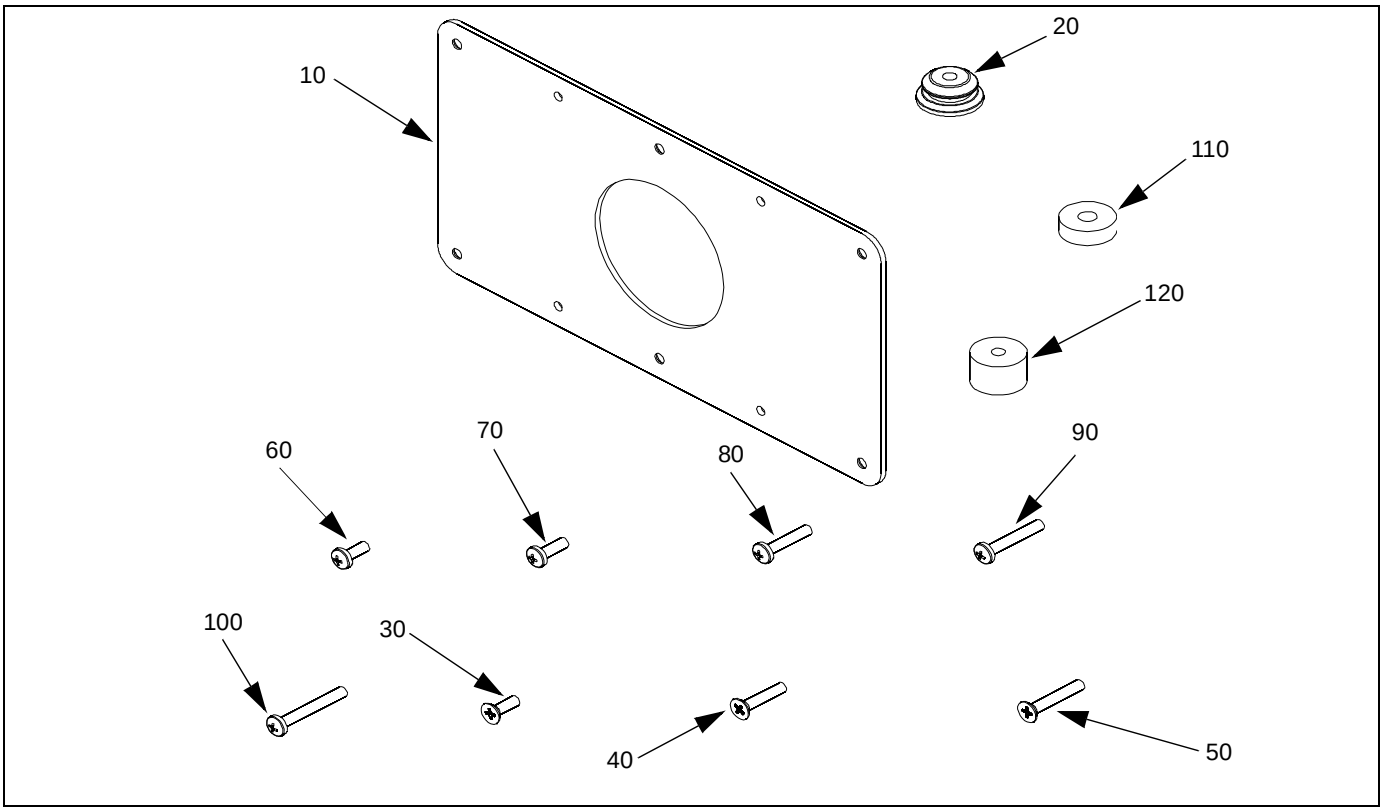

Figure 1: Parts

INSTALLATION

CAUTION: IMPROPER INSTALLATION CAN LEAD TO DISPLAY FALLING! Use only hardware provided and referenced within these instructions. DO NOT substitute!

Installation For Mounts Equipped With Latching Flags

To install the FSB-V on Latching Flag Equipped Mounts:

1. Assemble four mounting buttons (20) to interface bracket (10) using four M4 x 12mm Phillips pan head screws (70). (See Figure 2)

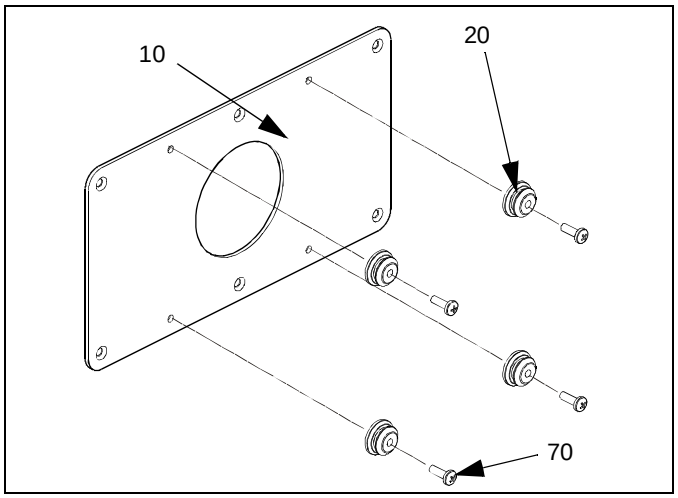

Figure 2: Assemble Mounting Buttons to Interface

Flush Mount Display Interface Installation

1. Assemble interface bracket assembly (with mounting buttons) to display using six M4 x 12mm Phillips flat head screws (30). (See Figure 3)

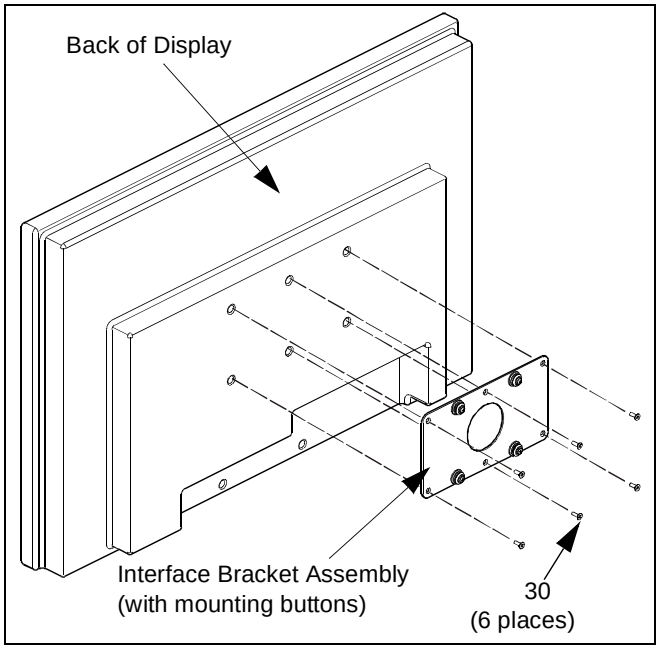

Figure 3: Interface Installation, (Flush Mount)

Recessed Mount Display Interface Installation

1. Align and place six spacers (110 or 120) over mounting holes in display back. (See Figure 4)
2. Align and place interface bracket assembly over six spacers (110 or 120). (See Figure 4)
3. Secure interface assembly to display back using six M4 x 20mm (40) or six M4 x 25mm (50) Phillips flat head screws. (See Figure 4)

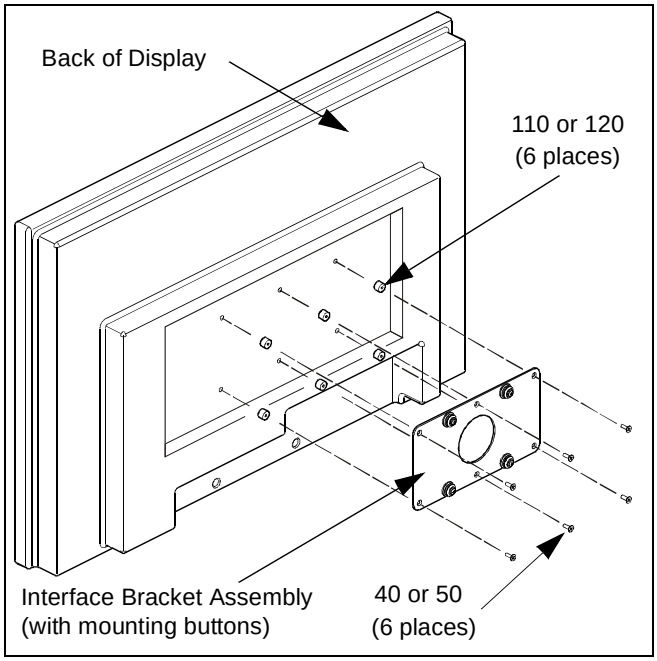

Figure 4: Interface Installation (Recessed Mount)

Installation For Mounts Equipped With Centris Cup Technology

CAUTION: IMPROPER INSTALLATION CAN LEAD TO DISPLAY FALLING! Use only hardware provided and referenced within these instructions. DO NOT substitute!

VESA® 200mm x 100mm Flush Mount Display Installation

IMPORTANT ! : If the display being mounted has a VESA® compliant mounting pattern of 75mm x 75mm or 100mm x 100mm follow the installation instructions provided with the mount.

If the display being mounted has a 200mm x 100mm VESA® :

1. Place display face down on a clean dry surface
2. Assemble interface bracket (10) to display using six M4 x 12mm Phillips flat head screws (30). (See Figure 5)

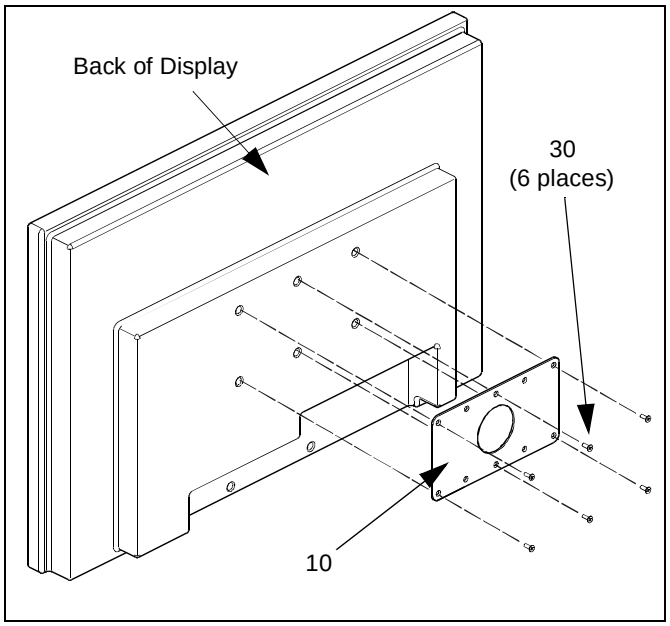

Figure 5: Interface Installation, (Flush Mount)

3. Align and place six spacers (110 or 120) over mounting holes in display back. (See Figure 6)
4. Align and place interface bracket (10) over six spacers (110 or 120). (See Figure 6)
5. Secure interface assembly to display back using six M4 x 20mm (40) or six M4 x 25mm (50) Phillips flat head screws. (See Figure 6)

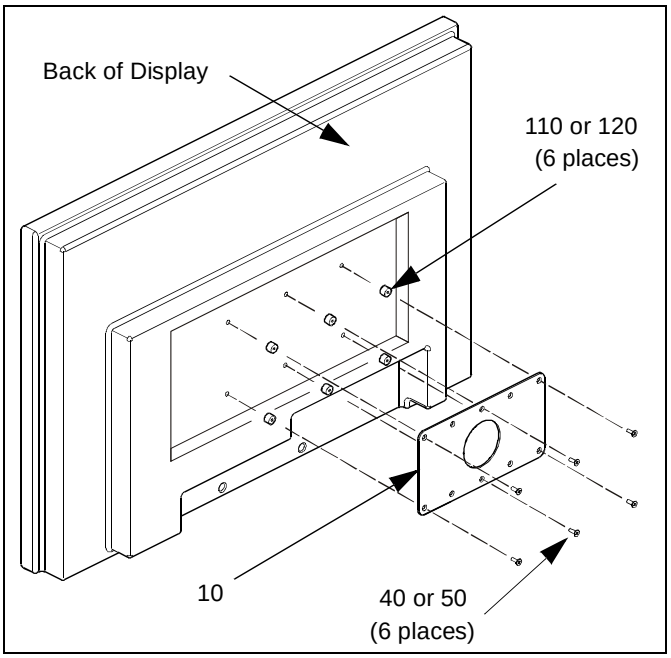

Figure 6: Interface Installation, (Recessed Mount)

6. Assemble two M4 x 20mm Phillips pan head upper mounting screws (80) into interface bracket. (See Figure 7)

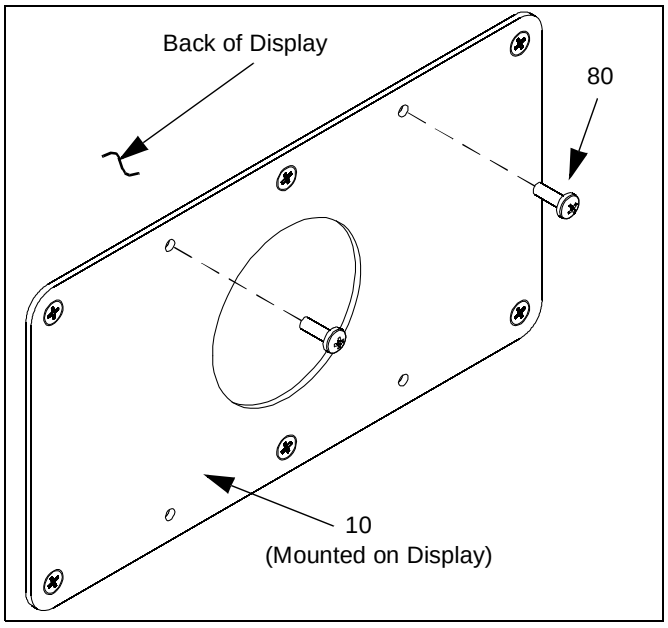

Figure 7: Install Centris Mounting Screws

7. Align two mounting screws (80) with upper teardrop mounting holes in Centris head.
8. Insert two upper mounting screws (80) into upper teardrop mounting holes in Centris head, and lower display until mounting screws are fully seated in lower area of teardrop mounting holes. (See Figure 8)

NOTE: DO NOT fully tighten mounting screws at this time.

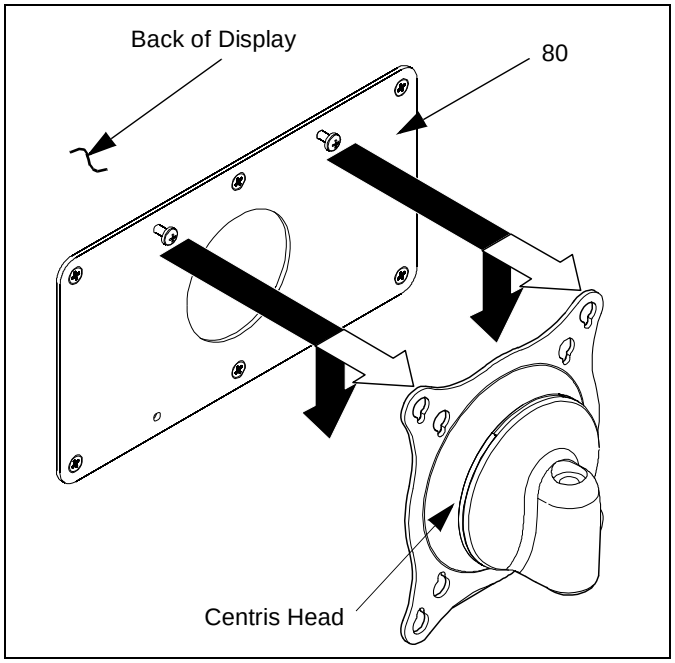

Figure 8: Install Centris Head

9. Insert two lower mounting screws (80) into lower teardrop mounting holes in Centris head. (See Figure 9)

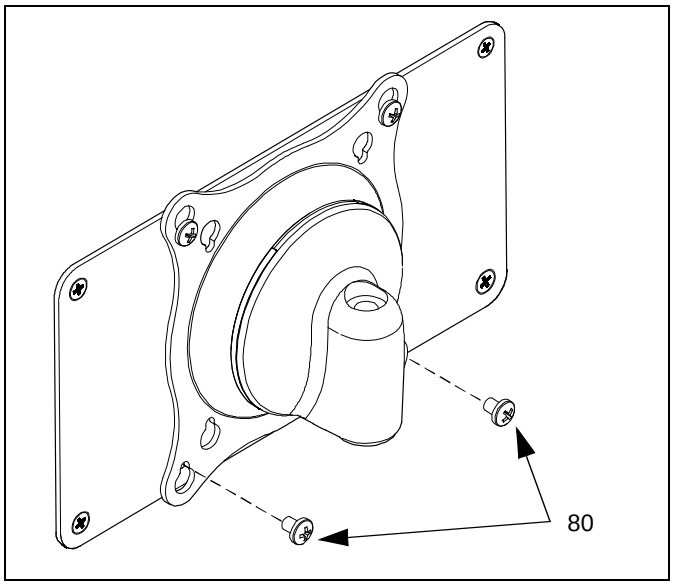

Figure 9: Install Lower Mounting Screws

10. Fully tighten four mounting screws.

30% POST-CONSUMER CONTENT